


FDA COMPLIANT PUMPS

SPFP30SSS – 3"

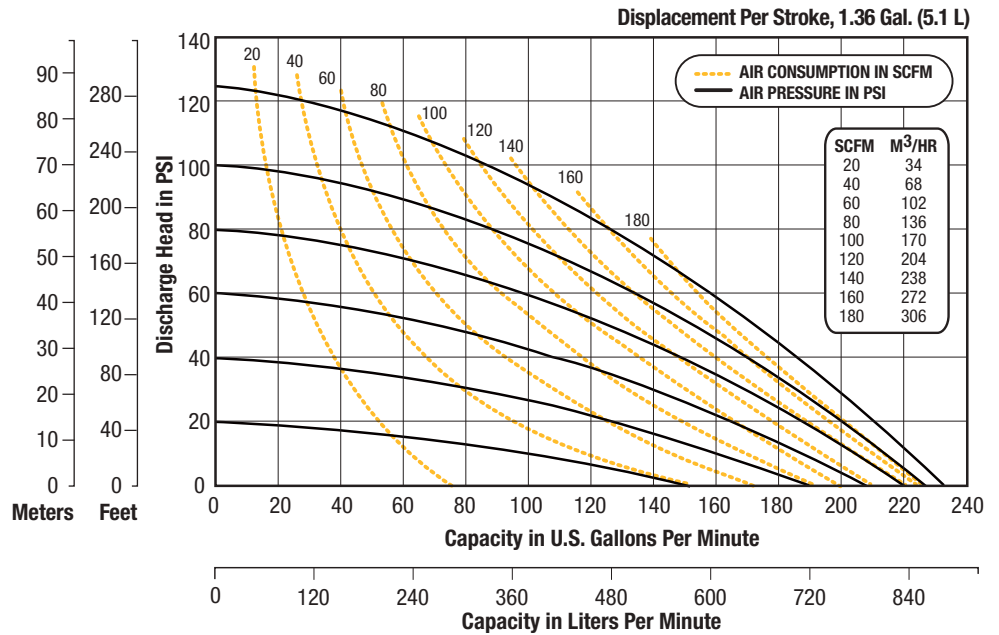

Technical Specifications

Max Flow 234 GPM (886 LPM)
Max Air Supply or Liquid Pressure ... 125 psig (8,6 bar)
Max Particle Size (Dia.) 3/8" (9,5 mm)
Suction Lift 20' Dry / 32 Wet (6,1 m / 9,8 m)
Temperature Range ... -40° F (-40° C) to 275° F (134° C)
Elastomers Santoprene
Center Block SS316
Wetted Section SS316

Port Configuration Center Horizontal
Intake / Discharge Connection 3" Tri-Clamp®
Air Inlet / Exhaust 1/2" NPT / 1" NPT
Noise Level 96 db (A)
Shipping Weight 189 lbs (86 kg)
Wet End Kit Part Number 200-100
Air Valve Kit Part Number 200-009

