



LOFPLEAT™ HF high flow filter cartridges

Eaton's LOFPLEAT HF filter cartridges can be used in a variety of applications where high flow capacity is required including chemical and water systems.

LOFPLEAT HF filter cartridges are designed with pleated polypropylene construction to provide a high total surface area. A single LPHF cartridge can replace several standard cartridge elements. Change-outs are quick and easy. Unlike standard design cartridges, the flow is inside out. The result is higher dirt-holding capacity.

Features and benefits

- Higher flow capacity reduces required number of cartridges
- Lower initial costs with smaller filter housings
- Less labor required for change-outs
- Inside-out flow for greater dirt-holding capacity
- Capable of flow rates up to 500 GPM (1893 l/min) in a single 60" length

- Can be retrofitted in most competitive high-flow housings

Specifications

Filter material
Polypropylene

Cage, end caps
Polypropylene

Gaskets/O-rings
EPDM (standard), FKM

Retention ratings
1, 5, 10, 20, 40, 60 μm
@ 99.9% efficiency

Technical data

Nominal lengths
20", 40", 60" (508, 1016, 1524 mm)

Outside diameter
6" (152 mm)

Surface area
22.6 ft² (2.1 m²) per 20" element

Max. operating temperature
176 °F (80 °C)

Max. differential pressure
43 psid @ 70 °F (3.0 bar @ 21 °C)

Recommended differential change-out pressure for disposal
35 psid (2.4 bar)

Max. flow rates
20" element: 175 USGPM (662 l/min)
40" element: 350 USGPM (1325 l/min)
60" element: 500 USGPM (1893 l/min)



Powering Business Worldwide

LOFPLEAT HF high flow filter cartridges

Efficiency of retention

Betaverhältnis Filtereffizienz	Beta 1000 99.90 %	Beta 100 99 %	Beta 10 90 %
1 µm	1	0.6	0.2
5 µm	5	4	3
10 µm	10	8.5	6.5
20 µm	22	19	14
40 µm	38	18	15
60 µm	60	35	20

$$\text{Beta ratio} = \frac{\text{Upstream particle counts}}{\text{Downstream particle counts}}$$


The micron ratings shown at various efficiency and beta ratio value levels were determined through laboratory testing, and can be used as a guide for selecting cartridges and estimating their performance. Under actual field conditions, results may vary somewhat from the values shown due to the variability of filtration parameters.

Element pressure drop

	mbar/m³/h			psid/gpm		
	20"	40"	60"	20"	40"	60"
1	5.5150	2.1900	1.6350	0.0182	0.0072	0.0054
5	4.7350	1.5800	1.0950	0.0156	0.0052	0.0036
10	2.5650	1.0600	0.7350	0.0084	0.0035	0.0024
20	2.0350	0.5400	0.3450	0.0067	0.0018	0.0011
40	0.9450	0.4050	0.2600	0.0031	0.0013	0.0009
60	0.6500	0.3050	0.1650	0.0021	0.0010	0.0005

Note: For chemical compatibility, flow rates, and temperature requirements please consult the factory or your local Eaton distributor.

Ordering code

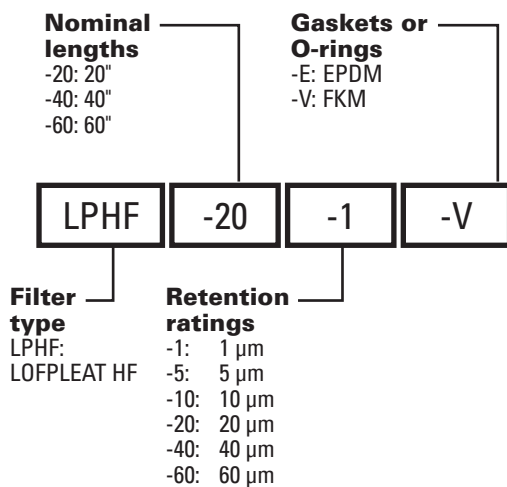

North America
44 Apple Street
Tinton Falls, NJ 07724
Toll Free: 800 656-3344
(North America only)
Tel: +1 732 212-4700

Europe/Africa/Middle East
Auf der Heide 2
53947 Nettersheim, Germany
Tel: +49 2486 809-0

Friedensstraße 41
68804 Altlußheim, Germany
Tel: +49 6205 2094-0
An den Nahewiesen 24
55450 Langenlonsheim, Germany
Tel: +49 6704 204-0

China
No. 3, Lane 280,
Linhong Road
Changning District, 200335
Shanghai, P.R. China
Tel: +86 21 5200-0099

Singapore
100G Pasir Panjang Road #07-08
Singapore 118523
Tel: +65 6825-1668

Brazil
Av. Ermano Marchetti, 1435 -
Água Branca, São Paulo - SP,
05038-001, Brasil
Tel: +55 11 3616-8461

For more information, please
email us at filtration@eaton.com
or visit www.eaton.com/filtration

© 2020 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

US
EF-LPHF
06-2020