

Eaton's MAXILINE
VMBF multi-bag filter
housing is user-friendly,
cost-effective and
designed for high
volume applications and
processes demanding
frequent filter bag
change-outs. Ideal for
batch process runs
and high dirt load
applications.

This multi-bag filter housing is equipped with the QIC-LOCKTM opening mechanism. Units are available in 4, 6, 8, 10 and 12 filter bag configurations and come standard with filter bag size 02 stainless steel restrainer baskets.

### **Features**

- Low profile design with side inlet and tangential outlet provides easy and full drainage and reduces housing height to make filter bag change-outs easier. No need for ladders, stools or catwalks
- Positive O-ring sealing provides bypass-free, safe filtration while the unique 3-point hold down ensures a high-quality seal between each filter bag and the housing body

- QIC-LOCK opening mechanism allows for safe, easy and fast filter bag change-outs for higher productivity and lower operating costs. Ideal for processes requiring frequent filter bag changes such as batch applications
- Automatic safety interlock for venting housing (cover cannot be opened if housing is under pressure)
- A counter-balanced, spring-assisted cover lifting mechanism allows for quick and easy opening of even large covers by one person
- Heavy-duty stainless steel mounting legs are included
- Designed in accordance with Section VIII, Division 1 of the ASME Code

# **Options**

- Available in 304 or 316 stainless steel for high corrosion resistance
- Buna N<sup>®</sup> O-rings for the cover are standard. EPDM, Viton<sup>®</sup> or silicone rubber seals and gaskets are available
- Multiple I/O connections to suit application

Viton® is a registered trademark of E. I. du Pont








QIC-LOCK rapid opening mechanism ensures simple, operator-friendly, and safe operation with minimal downtime to increase productivity and decrease running costs

# MAXILINE VMBF Multi-Bag Filter Housing

# **Applications**

| Coarse filtration > 500 µm | ~ |
|----------------------------|---|
| Medium filtration >10 µm   | ~ |
| Fine filtration < 10 µm    | ~ |
|                            |   |
| Pre-filtration             | ~ |
| Safety filtration          | ~ |
| High volume                | • |
| Batch filtration           | ~ |
| Circuit filtration         | ~ |
| Continuous filtration      |   |
|                            |   |
| Solvents, paints           | ~ |
| Fats and oils              | • |
| Catalyst, activated carbon |   |
| Acids, bases               | ~ |
| Petrochemicals             | ~ |
| Water, waste water         | ~ |
| Chemical industry          | ~ |
| Pharmaceuticals            |   |
| Metal cleaning             | ~ |
| Automotive                 | ~ |
| Electronics                |   |
| Food and beverage          |   |
| Paint and lacquer          | ~ |
| Water treatment            | V |
| Galvanic industry          |   |
|                            |   |

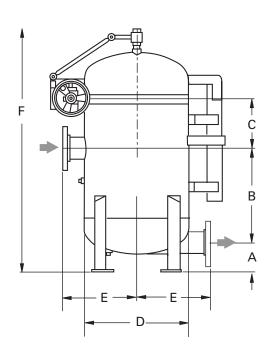

# Dimensions - inch (mm)

| Models    | A           | В           | C           | D           | E           | F            |
|-----------|-------------|-------------|-------------|-------------|-------------|--------------|
| VMBF-0402 | 6.00 (152)  | 20.00 (508) | 10.47 (266) | 22.00 (559) | 15.75 (400) | 68.00 (1727) |
| VMBF-0602 | 7.25 (184)  | 20.00 (508) | 12.78 (325) | 31.50 (800) | 20.50 (521) | 82.00 (2083) |
| VMBF-0802 | 8.25 (210)  | 19.00 (483) | 12.78 (325) | 31.50 (800) | 20.50 (521) | 82.00 (2083) |
| VMBF-1002 | 10.00 (254) | 19.00 (483) | 14.37 (365) | 38.00 (965) | 25.00 (635) | 92.00 (2337) |
| VMBF-1202 | 10.00 (254) | 19.00 (483) | 14.37 (365) | 38.00 (965) | 25.00 (635) | 92.00 (2337) |

Dimensions for reference only and approximate. Exact dimensions for installation purposes available on request. The 8 bag loop style dimensions are available

# **Technical data**

| Models    | No. of<br>filter bags | Size | Flow rate <sup>1</sup><br>GPM (m³/h) | Max. pressure<br>psi (bar) | Max. temp.<br>°F (°C) | Housing volume<br>gal (I) | Housing weight<br>lb (kg) | I/O<br>connections |
|-----------|-----------------------|------|--------------------------------------|----------------------------|-----------------------|---------------------------|---------------------------|--------------------|
| VMBF-0402 | 4                     | 2    | 705 (160)                            | 150 (10)                   | 250 (121)             | 69 (261)                  | 484 (220)                 | 4"                 |
| VMBF-0602 | 6                     | 2    | 1057 (240)                           | 150 (10)                   | 250 (121)             | 139 (526)                 | 920 (417)                 | 6"                 |
| VMBF-0802 | 8                     | 2    | 1409 (320)                           | 150 (10)                   | 250 (121)             | 141 (534)                 | 970 (440)                 | 8"                 |
| VMBF-1002 | 10                    | 2    | 1761 (400)                           | 150 (10)                   | 250 (121)             | 248 (939)                 | 1,050 (476)               | 10"                |
| VMBF-1202 | 12                    | 2    | 2114 (480)                           | 150 (10)                   | 250 (121)             | 248 (939)                 | 1,070 (485)               | 10"                |

<sup>&</sup>lt;sup>1</sup> Maximum theoretical flow based on water viscosity, filter bag specific.

### North America

44 Apple Street Tinton Falls, NJ 07724 Toll Free: 800 656-3344 (North America only) Tel: +1 732 212-4700

# Europe/Africa/Middle East

Auf der Heide 2 53947 Nettersheim, Germany Tel: +49 2486 809-0

Friedensstraße 41 68804 Altlußheim, Germany Tel: +49 6205 2094-0

An den Nahewiesen 24 55450 Langenlonsheim, Germany Tel: +49 6704 204-0

No. 3, Lane 280, Linhong Road Changning District, 200335 Shanghai, P.R. China Tel: +86 21 5200-0099

100G Pasir Panjang Road #07-08 Singapore 118523 Tel: +65 6825-1668

Av Ermano Marchetti 1435 -Água Branca, São Paulo - SP, 05038-001, Brésil Tel: +55 11 3616-8461

### For more information, please email us at filtration@eaton.com or visit www.eaton.com/filtration

© 2020 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommenda-tions appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

US EF-FBH-05 08-2020



