



Affordable and reliable sewn filter bags

Eaton's SNAP-RING multifilament filter bags are suitable for a wide range of process applications such as the filtration of paints and varnishes, inks, resins and many more.

SNAP-RING multifilament filter bags are designed for surface filtration to retain particles that are larger than the respective pore size. These filter bags are not *absolute* rated.

Features and benefits

- Single fibers twisted together to a single filament which is woven into a specific pattern
- Intersections of single filaments are not fusion-welded
- Eaton strongly recommends the use of an insertion tool that facilitates the insertion of the filter bag into the bag filter housing and ensures the correct alignment of the filter bag inside the restrainer basket

Filter specifications

Material
Multifilament polyester

Seal ring
Sewn zinc-plated steel
SNAP-RING seal ring

Retention ratings
100, 150, 250, 400, 600, 800 μm

Dimensions/Parameters

Sizes
01: $\emptyset 7 \times 17''$ L (180 x 430 mm)
02: $\emptyset 7 \times 32''$ L (180 x 810 mm)

Filter area
01: 2.6 ft² (0.24 m²)
02: 5.2 ft² (0.48 m²)

Max. operating temperature
293 °F (145 °C)

Max. differential pressure
36.2 psi (2.5 bar)

Recommended change-out pressure for disposal¹
11.6 – 21.7 psi (0.8 – 1.5 bar)

Max. flow rates²
01: 88 GPM (20 m³/h)
02: 176 GPM (40 m³/h)



Powering Business Worldwide

Multifilament Filter Bag Range


Retention ratings

Material	Code	Retention ratings (µm)						Sewn SNAP-RING seal ring	Max. operating temperature °F (°C)	Sizes	
		100	150	250	400	600	800			01	02
Polyester	PEMU	■	■	■	■	■	■	S	293 (145)	■	■



SNAP-RING seal ring

Ordering information

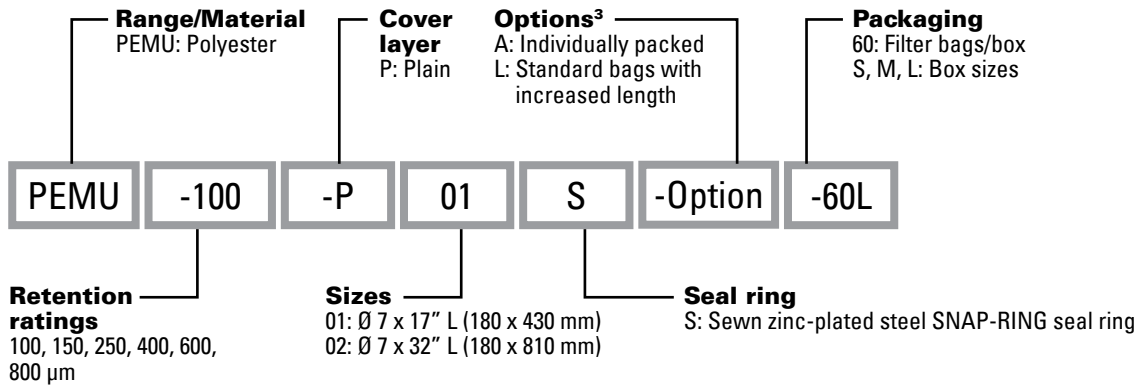

¹ Depending on the respective application requirements.

² For liquids with a dynamic viscosity of 1 mPa·s @ 68 °F (20 °C).

³ Further options upon request (see document SAL-L-12).

North America

44 Apple Street
Tinton Falls, NJ 07724
Toll Free: 800 656-3344
(North America only)
Tel: +1 732 212-4700

Europe/Africa/Middle East

Auf der Heide 2
53947 Nettersheim, Germany
Tel: +49 2486 809-0

Friedensstraße 41
68804 Altlußheim, Germany
Tel: +49 6205 2094-0

An den Nahewiesen 24
55450 Langenlonsheim, Germany
Tel: +49 6704 204-0

China

No. 3, Lane 280,
Linhong Road
Changning District, 200335
Shanghai, P.R. China
Tel: +86 21 5200-0099

Singapore

4 Loyang Lane #04-01/02
Singapore 508914
Tel: +65 6825-1668

Brazil

Av. Julia Gaioli, 474 – Bonsucesso
07251-500 – Guarulhos, Brazil
Tel: +55 11 2465-8822

For more information, please
email us at filtration@eaton.com
or visit www.eaton.com/filtration

© 2016 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

US
EF-FTB-16
06-2016



Powering Business Worldwide

