PROLINE 150[™] Series HE Multi-Bag Filter Housing



Eaton's PROLINE 150 Series HE multi-bag filter housing offers the most cost-effective solution to multi-bag units requirements' for a wide variety of filtration applications where a code stamp is not needed. This multi-bag filter housing is equipped with a proven and easyto-use rugged eye-bolt cover closure. Units are available in 3, 4, 6 and 8 filter bag configurations and come standard with filter bag size 02 stainless steel restrainer baskets.

Features

- 150 psi (10 bar), non-code bag filter housing, for a wide variety of filtration applications
- Low profile design with side inlet and tangential outlet provides easy and full drainage and reduces housing height to make filter bag change-outs easier. No need for ladders, stools or catwalks
- Positive 0-ring sealing provides bypass-free, safe filtration while the unique 3-point hold down ensures a high-quality seal between each filter bag and the housing body
- A counter-balanced, spring-assisted cover lifting mechanism allows for quick and easy opening of even large covers by one person
- 304 stainless steel construction
- 150# RF flanged inlet and outlet ports for side inlet and tangential outlet configuration
- Heavy-duty stainless steel mounting legs are included

Options

Available as in-line or loop piping configuration (shown)

PROLINE 150 Series HE multi-bag filter

housing with

8 filter bag capacity

 Buna-N[®] O-rings for the cover are standard. EPDM, Viton[®], PTFE encapsulated Viton seals are available

Viton® is a registered trademark of E. I. du Pont de Nemours and company






PROLINE 150 Series HE multi-bag filter housings


Applications

Coarse filtration > 500 µm	~
Medium filtration > 10 µm	~
Fine filtration < 10 µm	V

Pre-filtration	~
Safety filtration	~
High volume	¥
Batch filtration	~
Circuit filtration	~
Continuous filtration	

Solvents, paints	~
Fats and oils	~
Catalyst, activated carbon	
Acids, bases	~
Petrochemicals	~
Water, waste water	~
Chemical industry	~
Pharmaceuticals	
Metal cleaning	V
Automotive	~
Electronics	
Food and beverage	
Paint and lacquer	~
Water treatment	~
Galvanic industry	



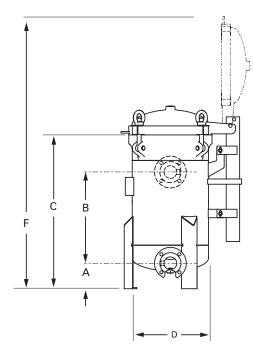

Dimensions - inch (mm)

Model	A	В	C	D	E	F	G
PMBF-0302-BB10-030A-NT-11HE	6.00 (152)	21.50 (546)	43.00 (1092)	18.00 (457)	27.44 (697)	64.19 (1603)	13.72 (348)
PMBF-0302-BB10-030A-NT-11HE-L	6.00 (152)	21.50 (546)	43.00 (1092)	18.00 (457)	23.53 (598)	64.19 (1603)	13.72 (348)
PMBF-0402-BB10-040A-NT-11HE	8.77 (223)	20.75 (527)	46.79 (1189)	22.00 (559)	35.42 (900)	70.73 (1797)	17.71 (450)
PMBF-0402-BB10-040A-NT-11HE-L	8.77 (223)	20.75 (527)	46.79 (1189)	22.00 (559)	30.88 (784)	70.73 (1797)	17.71 (450)
PMBF-0602-BB10-060A-NT-11HE	7.00 (178)	20.00 (508)	45.94 (1167)	26.00 (660)	38.98 (990)	73.45 (1866)	19.50 (495)
PMBF-0602-BB10-060A-NT-11HE-L	7.00 (178)	20.00 (508)	45.94 (1167)	26.00 (660)	31.69 (881)	73.45 (1866)	19.50 (495)
PMBF-0802-BB10-080A-NT-11HE	8.00 (203)	22.06 (560)	56.22	30.00 (762)	42.00 (1067)	84.37 (2143)	21.00 (533)
PMBF-0802-BB10-080A-NT-11HE-L	8.00 (203)	22.06 (560)	56.22	30.00 (762)	39.03 (991)	84.37 (2143)	21.00 (533)

Technical data

Models	No. of filter bags	Size	Flow rate ¹ GPM (m³/h)	Max. pressure psi (bar)	Max. temp. °F (°C)	Housing volume gal (I)	Housing weight Ib (kg)	l/O connections
PMBF-0302-BB10-030A-NT-11HE	3	2	225 (51)	150 (10)	200 (93)	34 (129)	351 (159)	3" in-line
PMBF-0302-BB10-030A-NT-11HE-L	3	2	225 (51)	150 (10)	200 (93)	34 (129)	351 (159))	3″ loop
PMBF-0402-BB10-040A-NT-11HE	4	2	400 (91)	150 (10)	200 (93)	53 (200)	496 (225)	4" in-line
PMBF-0402-BB10-040A-NT-11HE-L	4	2	400 (91)	150 (10)	200 (93)	53 (200)	496 (225)	4" loop
PMBF-0602-BB10-060A-NT-11HE	6	2	900 (204)	150 (10)	200 (93)	75 (284)	680 (308)	6" in-line
PMBF-0602-BB10-060A-NT-11HE-L	6	2	900 (204)	150 (10)	200 (93)	75 (284)	680 (308)	6" loop
PMBF-0802-BB10-080A-NT-11HE	8	2	1409 (320)	150 (10)	200 (93)	123 (466)	870 (394)	8" in-line
PMBF-0802-BB10-080A-NT-11HE-L	8	2	1409 (320)	150 (10)	200 (93)	123 (466)	870 (394)	8″ loop

Dimensions for reference only and approximate. Exact dimensions for installation purposes available on request.

¹ Maximum theoretical flow based on water viscosity, filter bag specific,

North America 44 Apple Street Tinton Falls, NJ 07724

Toll Free: 800 656-3344 (North America only) Tel: +1 732 212-4700

Europe/Africa/Middle East

Auf der Heide 2 53947 Nettersheim, Germany Tel: +49 2486 809-0

Friedensstraße 41 68804 Altlußheim, Germany Tel: +49 6205 2094-0

An den Nahewiesen 24 55450 Langenlonsheim, Germany Tel: +49 6704 204-0

China

No. 3, Lane 280, Linhong Road Changning District, 200335 Shanghai, P.R. China Tel: +86 21 5200-0099

Sind

100G Pasir Panjang Road #07-08 Singapore 118523 Tel: +65 6825-1668

Brazil

Av Ermano Marchetti 1435 -Água Branca, São Paulo - SP, 05038-001, Brésil Tel: +55 11 3616-8461

For more information, please email us at filtration@eaton.com or visit www.eaton.com/filtration

© 2020 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommenda-tions appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

US EF-FBH-04 08-2020

Powerina Business Worldwide