



## Table of Contents

Engineering Data and Performance Curve.....	1
Explanation of Pump Nomenclature.....	2
Dimensions.....	3
Principle of Operation.....	4
Installation and Start-Up.....	4
Air Supply.....	4
Air Inlet & Priming.....	4
Installation Guide.....	5
ESADS+Plus®: Externally Serviceable Air Distribution System.....	6
Pilot Valve.....	7
Pilot Valve Actuator.....	7
Air Exhaust.....	7
Between Uses.....	7
Flap Valve Servicing.....	7
Diaphragm Servicing.....	7
Reassembly.....	7
Service Instructions: Troubleshooting.....	8
Warranty.....	8
Grounding The Pump.....	9
Important Safety Information.....	10
Recycling.....	10
Material Codes.....	11
Composite Repair Parts List.....	12-13
Composite Repair Drawing.....	14
CE Declaration of Conformity - Machinery.....	15
CE Declaration fo Conformity - ATEX.....	16
Explanation of ATEX Certification.....	17



**WARREN  
RUPP®**

Quality System  
ISO 9001 Certified

Environmental  
Management System  
ISO 14001 Certified

**IDEX**  
FLUID & METERING



**SANDPIPER®**  
A WARREN RUPP PUMP BRAND

**Heavy Duty Flap Valve**

**HDF3-A Type 7**  
**HDF4-A Type 3**

**Air-Operated  
Double Diaphragm Pump**

ENGINEERING, PERFORMANCE  
& CONSTRUCTION DATA



See pages 16 & 17  
for ATEX ratings


**INTAKE/DISCHARGE PIPE SIZE**  
3" 150# ANSI Flange

**CAPACITY**  
0 to 260 gallons per minute  
(0 to 988 liters per minute)

**AIR VALVE**  
No-lube, no-stall  
design

**SOLIDS-HANDLING**  
Up to nearly 3" (75mm)

**HEADS UP TO**  
125 psi or 289 ft. of water  
(8.8 Kg/cm<sup>2</sup> or 88 meters)

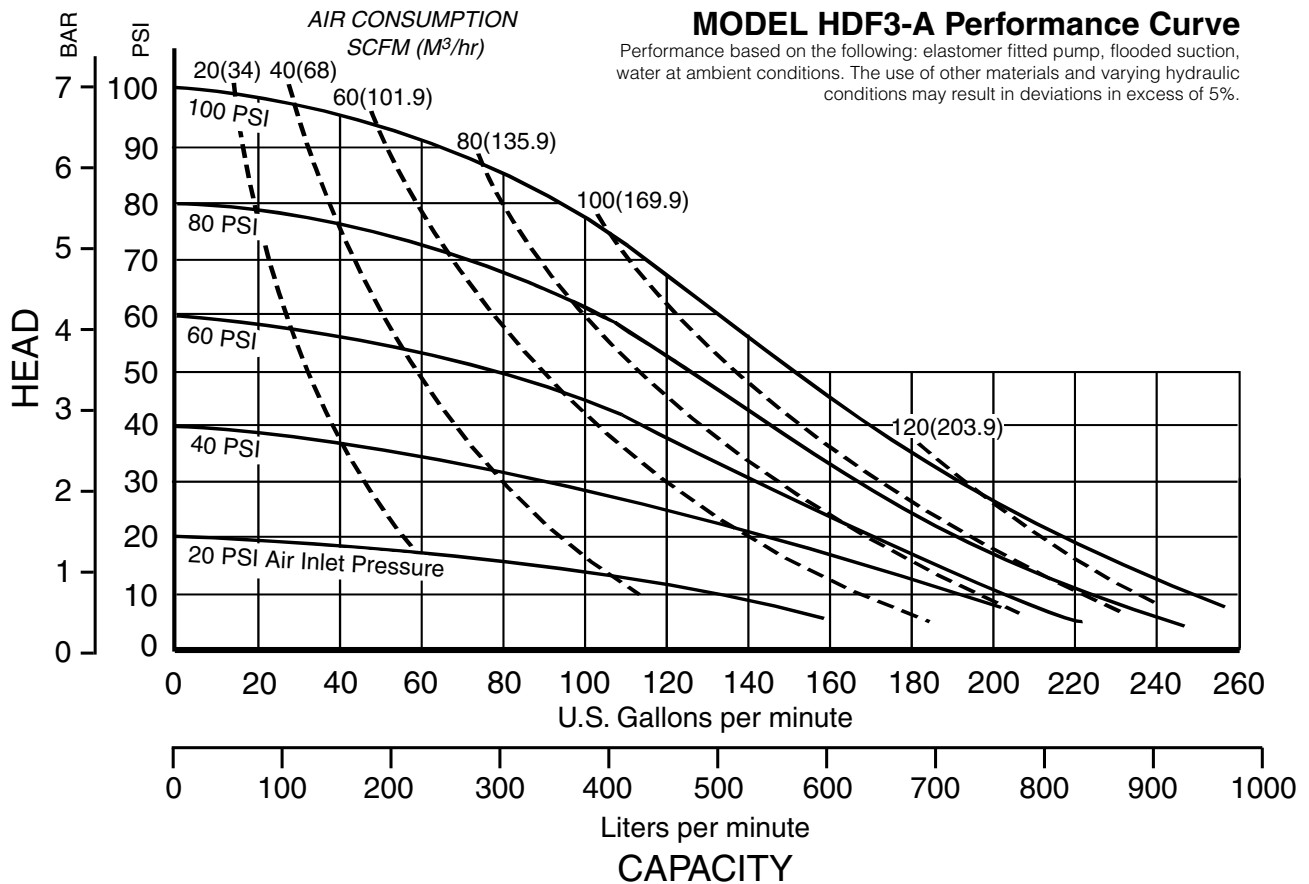

SANDPIPER® pumps are designed to be powered only by compressed air.

# Explanation of Pump Nomenclature, HDF3-A & HDF4-A

## MATERIALS OF CONSTRUCTION

To order a pump or replacement parts, first enter the Model Number <b>HDF3-A</b> , or <b>HDF4-A</b> , followed by the Type Designation listed below in the far left column.															
Type	Manifold Elbow	Outer Chamber	Inner Chamber	Outer Diaphragm Plates	Inner Diaphragm Plate	Intermediate Housing	Diaphragm Rod	Valve Seat	Hardware	Diaphragm	Flap Valve Material	Seat Gasket	Sealing Rings	Shipping Wt. (lbs)	
DA7.	356-T6AL	356-T6AL	356-T6AL	Alm35AL	Alm35AL	356-T6AL	416SS	SS	PS	N	R	A	B	245	
DN7.	356-T6AL	356-T6AL	356-T6AL	Alm35AL	Alm35AL	356-T6AL	416SS	SS	PS	N	N	A	B	245	
DB7.	356-T6AL	356-T6AL	356-T6AL	Alm35AL	Alm35AL	356-T6AL	416SS	SS	PS	B	B	A	B	245	
DK7.	356-T6AL	356-T6AL	356-T6AL	Alm35AL	Alm35AL	356-T6AL	416SS	SS	PS	N	H	A	B	245	
DS7.	356-T6AL	356-T6AL	356-T6AL	Alm35AL	Alm35AL	356-T6AL	416SS	SS	PS	S	S	A	B	245	

### Meanings of Abbreviations:

A = Compressed Fibre  
AL = Aluminum  
ALM = Almag 35 Aluminum

B = Nitrile  
CI = Cast Iron  
H = Hytrel®

N = Neoprene  
PS = Plated Steel  
R = Urethane

SS = Stainless Steel  
S = Santoprene®

Hytrel is a registered tradename of E.I. du Pont. Santoprene is a registered tradename of Exxon Mobil Corp.

Maximum and Minimum Temperatures are the limits for which these materials can be operated. Temperatures coupled with pressure affect the longevity of diaphragm pump components. Maximum life should not be expected at the extreme limits of the temperature ranges.

Materials	Operating Temperatures	
	Maximum	Minimum
<b>Nitrile</b> General purpose, oil-resistant. Shows good solvent, oil, water and hydraulic fluid resistance. Should not be used with highly polar solvents like acetone and MEK, ozone, chlorinated hydrocarbons and nitro hydrocarbons.	190°F 88°C	-10°F -23°C
<b>NEOPRENE</b> All purpose. Resistant to vegetable oils. Generally not affected by moderate chemicals, fats, greases and many oils and solvents. Generally attacked by strong oxidizing acids, ketones, esters, nitro hydrocarbons and chlorinated aromatic hydrocarbons.	200°F 93°C	-10°F -23°C
<b>HYTREL®</b> Good on acids, bases, amines and glycols at room temperature.	220°F 104°C	-20°F -29°C
<b>Urethane</b> Shows good resistance to abrasives. Has poor resistance to most solvents and oils.	150°F 66°C	+32°F 0°C
<b>Santoprene®</b> Injection molded thermoplastic elastomer with no fabric layer. Long mechanical flex life. Excellent abrasion resistance.	275°F 135°C	-40°F -40°C
‡ <b>CF-8M Stainless Steel</b> equal to or exceeding ASTM specification A743 for corrosion resistant iron chromium, iron chromium nickel, and nickel based alloy castings for general applications. Commonly referred to as 316 Stainless Steel in the pump industry.		

For specific applications, always consult "Chemical Resistance Chart" Technical Bulletin




II 2 G c T5  
II 3/2 G c T5  
II 2 D c T100oC

All models, including pumps equipped with Aluminum wetted and midsection parts.  
See page 6 for ATEX Explanation of Type Examination Certificate.

# Dimensions: HDF3-A & HDF4-A

Dimensions are  $\pm 1/8"$

Figures in parenthesis = millimeters

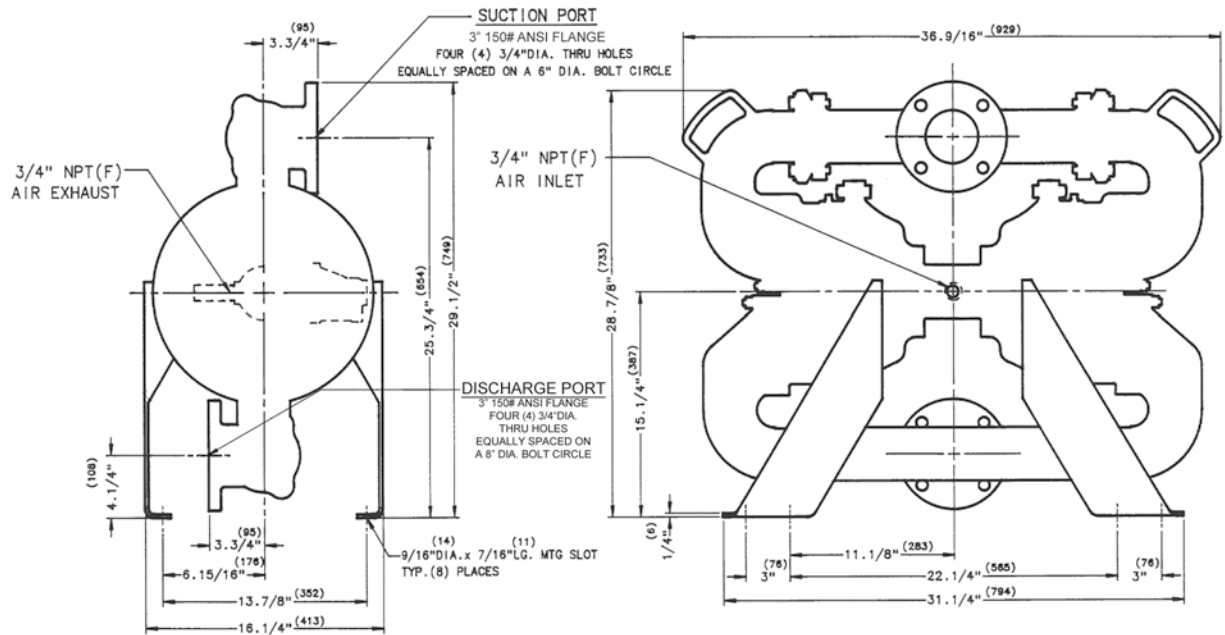

## PRINCIPLE OF PUMP OPERATION

This flap swing check valve pump is powered by compressed air and is a 1:1 pressure ratio design. It alternately pressurizes the inner side of one diaphragm chamber, while simultaneously exhausting the other inner chamber. This causes the diaphragms, which are connected by a common rod, to move endwise. Air pressure is applied over the entire surface of the diaphragm, while liquid is discharged from the opposite side. The diaphragm operates under a balanced condition during the discharge stroke, which allows the unit to be operated at discharge heads over 200 feet (61 meters) of water head.

Since the diaphragms are connected by a common rod, secured by plates to the center of the diaphragms, one diaphragm performs the discharge stroke, while the other is pulled to perform the suction stroke in the opposite chamber.

For maximum diaphragm life, keep the pump as close to the liquid being pumped as possible. Positive suction head in excess of 10 feet of liquid (3.048 meters) may require a back pressure regulating device. This will maximize diaphragm life.

Alternate pressuring and exhausting of the diaphragm chamber is performed by means of an externally mounted, pilot operated, four-way spool type air distribution valve. When the spool shifts to one end of the valve body, inlet air pressure is applied to one diaphragm chamber and the other diaphragm chamber exhausts. When the spool shifts to the opposite end of the valve body, the porting of chambers is reversed. The air distribution valve spool is moved by an internal pilot valve which alternately pressurizes one side of the air distribution valve spool, while exhausting the other side. The pilot valve is shifted at each end of the diaphragm stroke by the diaphragm plate coming in contact with the end of the pilot valve spool. This pushes it into position for shifting of the air distribution valve.

The chambers are manifolded together with a suction and discharge check valve for each chamber, maintaining flow in one direction through the pump.

## INSTALLATION & START-UP

Locate the pump as close to the product being pumped as possible, keeping suction line length and number of fittings to a minimum. Do not reduce line size.

For installations of rigid piping, short flexible sections of hose should be installed between pump and piping. This reduces vibration and strain to the piping system. A Warren Rupp Tranquillizer® Surge Suppressor is recommended to further reduce pulsation in flow.

This pump was tested at the factory prior to shipment and is ready for operation. It is completely self-priming from a dry start for suction lifts of 20 feet (6.096 meters) or less. For suction lifts exceeding 20 feet of liquid, fill the chambers with liquid prior to priming.

## AIR SUPPLY


Air supply pressures cannot exceed 125 psi (8.61 bar). Connect the pump air inlet to an air supply of sufficient capacity and pressure required for desired performance. When the air line is solid piping, use a short length of flexible hose (not less than 3/4" (19mm) in diameter) between pump and piping to eliminate strain to pipes.



## AIR INLET & PRIMING

For start-up, open an air valve approximately 1/2" to 3/4" turn. After the unit primes, an air valve can be opened to increase flow as desired. If opening the valve increases cycling rate, but does not increase flow rate, cavitation has occurred, and the valve should be closed slightly.

For the most efficient use of compressed air and the longest diaphragm life, throttle the air inlet to the lowest cycling rate that does not reduce flow.

 Available from  
Distributor

 Available from  
Warren Rupp

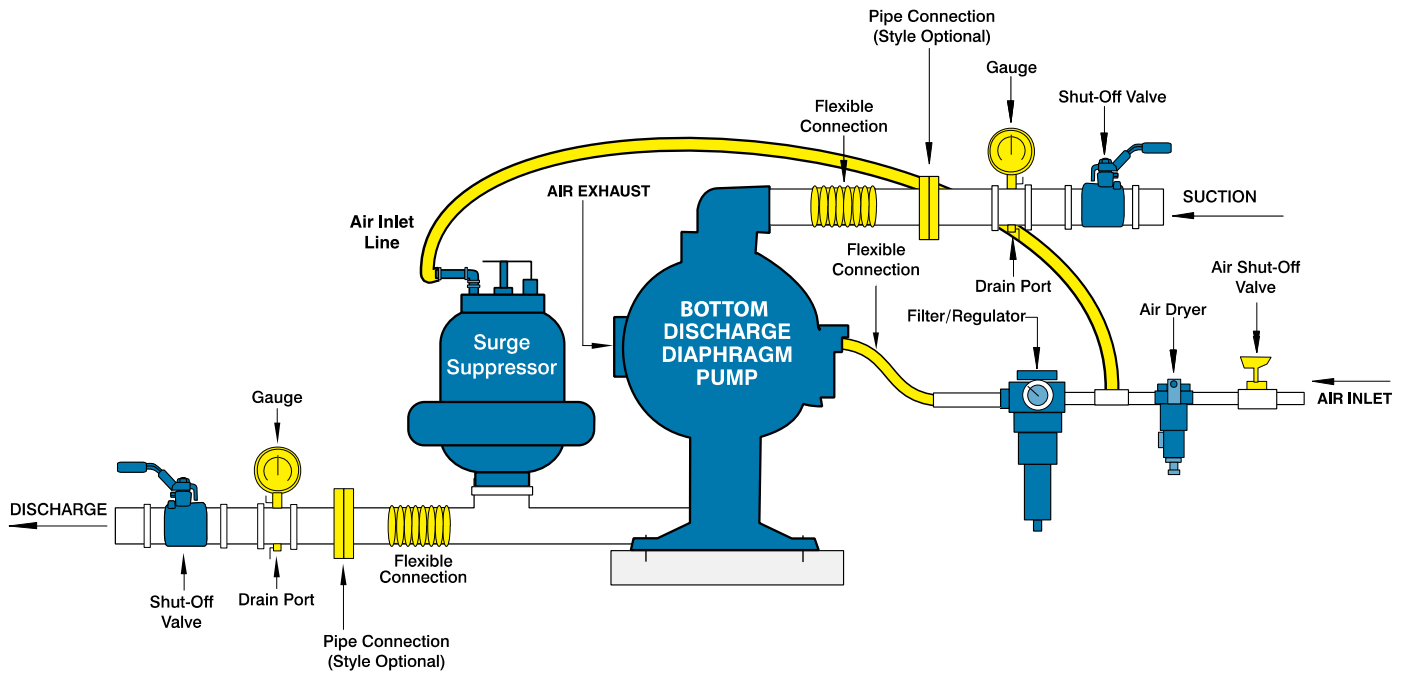

## AIR VALVE LUBRICATION

***The Sandpiper pump's pilot valve and main air valve assemblies are designed to operate WITHOUT lubrication. This is the preferred mode of operation.*** There may be instances of personal preference, or poor quality air supplies when lubrication of the compressed air supply is required. The pump air system will operate with properly lubricated compressed air supplies. Proper lubrication of the compressed air supply would entail the use of an air line lubricator (available from Warren Rupp) set to deliver one drop of 10 weight, non-detergent oil for every 20 SCFM of air the pump consumed at its point of operation. Consult the pump's published Performance Curve to determine this.

It is important to remember to inspect the sleeve and spool set routinely. It should move back and forth freely. This is most important when the air supply is lubricated. If a lubricator is used, oil accumulation will, over time, collect any debris from the compressed air. This can prevent the pump from operating properly.

Water in the compressed air supply can create problems such as icing or freezing of the exhaust air causing the pump to cycle erratically, or stop operating. This can be addressed by using a point of use air dryer (available from Warren Rupp) to supplement a plant's air drying equipment. This device will remove excess water from the compressed air supply and alleviate the icing or freezing problem.

## Externally Serviceable Air Distribution System

Please refer to the exploded view drawing and parts list in the Service Manual supplied with your pump. If you need replacement or additional copies, contact your local Warren Rupp Distributor, or the Warren Rupp factory Literature Department at the number shown below. To receive the correct manual, you must specify the MODEL and TYPE information found on the name plate of the pump.

### Models with 1" suction/discharge or larger and METAL center sections

The main air valve sleeve and spool set is located in the valve body mounted on the pump with four hex head capscrews. The valve body assembly is removed from the pump by removing these four hex head capscrews.

With the valve body assembly off the pump, access to the sleeve and spool set is made by removing four hex head capscrews (each end) on the end caps of the valve body assembly. With the end caps removed, slide the spool back and forth in the sleeve. The spool is closely sized to the sleeve and must move freely to allow for proper pump operation. An accumulation of oil, dirt or other contaminants from the pump's air supply, or from a failed diaphragm, may prevent the spool from moving freely. This can cause the spool to stick in a position that prevents the pump from operating. If this is the case, the sleeve and spool set should be removed from the valve body for cleaning and further inspection.

Remove the spool from the sleeve. Using an arbor press or bench vise (with an improvised mandrel), press the sleeve from the valve body. Take care not to damage the sleeve. At this point, inspect the o-rings on the sleeve for nicks, tears or abrasions. Damage of this sort could happen during assembly or servicing. A sheared or cut o-ring can allow the pump's compressed air supply to leak or bypass within the air valve assembly, causing the pump to leak compressed air from the pump air exhaust or not cycle properly. This is most noticeable at pump dead head or high discharge pressure conditions. Replace any of these o-rings as required or set up a routine, preventive maintenance schedule to do so on a regular basis. This practice should include cleaning the spool and sleeve components with a safety solvent or equivalent, inspecting for signs of wear or damage, and replacing worn components.

To re-install the sleeve and spool set, lightly lubricate the o-rings on the sleeve with an o-ring assembly lubricant or lightweight oil (such as 10 wt. air line lubricant). Press the set into the valve body easily, without shearing the o-rings. Re-install one end cap, gasket and bumper on the valve body. Using the arbor press or bench vise that was used in disassembly, press the sleeve back into the valve body. You may have to clean the surfaces of the valve body where the end caps mount. Material may remain from the old gasket. Old material not cleaned from this area may cause air leakage after reassembly. Take care that the bumper stays in place allowing the sleeve to press in all the way. Reinstall the spool, the opposite end cap, gasket and bumper on the valve body. After inspecting and cleaning the gasket surfaces on the valve body and intermediate, reinstall the valve body on the pump using new gaskets. Tighten the four hex head capscrews evenly and in an alternating cross pattern.



## **PILOT VALVE**

The pilot valve assembly is accessed by removing the main air distribution valve body from the pump and lifting the pilot valve body out of the intermediate housing.

Most problems with the pilot valve can be corrected by replacing the o-rings. Always grease the spool prior to inserting it into the sleeve. If the sleeve is removed from the body, reinsertion must be at the chamfered side. Grease the o-rings to slide the sleeve into the valve body. Securely insert the retaining ring around the sleeve. When reinserting the pilot valve, push both plungers (located inside the intermediate bracket) out of the path of the pilot valve spool ends to avoid damage.

## **PILOT VALVE ACTUATOR**

Bushings for the pilot valve actuators are threaded into the intermediate bracket from the outside. The plunger may be removed for inspection or replacement. First remove the air distribution valve body and the pilot valve body from the pump. The plungers can be located by looking into the intermediate. It may be necessary to use a fine piece of wire to pull them out. The bushing can be turned out through the inner chamber by removing the outer chamber assembly. Replace the bushings if pins have bent.

## **AIR EXHAUST**

If a diaphragm fails, the pumped liquid or fumes can enter the air end of the pump, and be exhausted into the atmosphere. When pumping hazardous or toxic materials, pipe the exhaust to an appropriate area for safe disposition.

This pump can be submerged if materials of construction are compatible with the liquid. The air exhaust must be piped above the liquid level. Piping used for the air exhaust must not be smaller than 1" (2.54 cm). Reducing the pipe size will restrict air flow and reduce pump performance. When the product source is at a higher level than the pump (flooded suction), pipe the exhaust higher than the product source to prevent siphoning spills.

Freezing or icing-up of the air exhaust can occur under certain temperature and humidity conditions. Use of a Warren Rupp Extractor/Dryer unit should eliminate most icing problems.

## **BETWEEN USES**

When used for materials that tend to settle out or transform to solid form, the pump should be completely flushed after each use, to prevent damage. Product remaining in the pump between uses could dry out or settle out. This could cause problems with valves and diaphragms at re-start. In freezing temperatures, the pump must be drained between uses in all cases.

## **CHECK VALVE SERVICING**

For flap valve inspection or replacement, remove the flange bolts securing the suction and discharge elbows and loosen Dresser-type couplings. The flap valves are exposed for inspection or servicing upon removal of elbows.

## **DIAPHRAGM SERVICING**

Diaphragms are serviced by removing the outer diaphragm chambers which are secured with 12 bolts. After removing the outer chamber, unbolt the diaphragm plate by removing 6 socket head capscrews (Allen wrench required). To remove the diaphragm rod, remove the inner diaphragm plate secured by a nut on the end of the diaphragm rod. The opposite diaphragm and rod can then be removed as a unit. The interior components consisting of sleeve bearings, rod seals, and pilot valve actuator bushings are now accessible for service if required.

## **REASSEMBLY**

All procedures for reassembling the pump are the reverse of the above with these further instructions:

1. Install the diaphragms with their natural bulge outward. Make certain that the rubber diaphragm rod bumper is installed on the rod behind each inner diaphragm plate. Re-torque the 6 socket head capscrews that secure the diaphragm between the plates to 30 foot lbs. (40.67 Newton meters) torque reading.

2. Caution should be used while reassembling the check valves. The valves are designed for some preload over the retainer and the hinge pad. This is done to insure proper face contact with the seat. After all parts are in place, tighten the lock nuts down on the assembly to the point where visual inspection shows that seat and valve face mate without gap. This is important for dry primes. However, after priming action has started, valves will function due to differential pressure without concern or trouble.

## **TROUBLE SHOOTING**

**PROBLEM:** Pump cycles but will not pump. (Note: higher suction lifts require faster cycling speed for priming.)

**POSSIBLE CAUSES:**

- A. Air leak in suction line.
- B. Excessive suction lift.
- C. Check valve not closing.
- D. Leakage at joint of suction manifold or elbow flange.
- E. Suction line plugged.
- F. Diaphragm ruptured.

**PROBLEM:** Pump will not cycle. (Note: Always disconnect air supply to relieve air pressure before disassembling any portion of pump.)

**POSSIBLE CAUSES:**

- A. Discharge hose or line plugged, or discharge head requirement greater than air pressure. (Disconnect discharge line to check.)
- B. Spool in air distribution valve not shifting. (Remove end cap and check spool - must slide freely.)
- C. Diaphragm ruptured. (Air will escape out discharge line in this case.)
- D. Blockage in diaphragm chamber preventing movement. (Shut off air supply and reopen after pressure is relieved.)
- E. Plugged or dirty exhaust muffler.

**PROBLEM:** Uneven discharge flow. (Indicates one chamber not operating properly.)

**POSSIBLE CAUSES:**

- A. Check valve not sealing properly in one chamber.
- B. Diaphragm failure in one chamber.
- C. Air leak at suction manifold joint or elbow flange one side.

For additional information, see the Warren Rupp Troubleshooting Guide.

## **WARRANTY**

This pump is warranted for a period of five years against defective material and workmanship. Failure to comply with the recommendations stated in this manual voids all factory warranty.

### **RECOMMENDED WARREN RUPP ACCESSORIES TO MAXIMIZE PUMP PERFORMANCE:**

- **Tranquillizer® Surge Suppressor.** For nearly pulse-free flow.
- **Warren Rupp Air Dryer.** For clean, dry compressed air.
- **Warren Rupp Filter/Regulator.** For modular installation and service convenience.
- **Warren Rupp Speed Control.** For manual or programmable process control. Manual adjustment or 4-20mA reception.

**For more detailed information on these accessories, contact your local Warren Rupp Factory-Authorized Distributor, or Warren Rupp corporate headquarters.**

# Grounding The Pump



## WARNING




*Take action to prevent static sparking. Fire or explosion can result, especially when handling flammable liquids. The pump, piping, valves, containers or other miscellaneous equipment must be grounded.*


One eyelet is fastened to the pump hardware.



One eyelet is installed to a true earth ground.

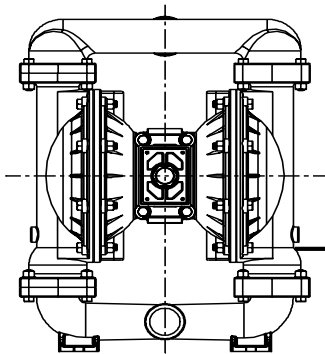

This 8 foot long (244 centimeters) Ground Strap, part number 920.025.000 can be ordered as a service item.



To reduce the risk of static electrical sparking, this pump must be grounded. Check the local electrical code for detailed grounding instruction and the type of equipment required, or in the absence of local codes, an industry or nationally recognized code having jurisdiction over specific installations.

# IMPORTANT SAFETY INFORMATION



## ! IMPORTANT

*Read these safety warnings and instructions in this manual completely, before installation and start-up of the pump. It is the responsibility of the purchaser to retain this manual for reference. Failure to comply with the recommendations stated in this manual will damage the pump, and void factory warranty.*



## ! CAUTION

*Before pump operation, inspect all gasketed fasteners for looseness caused by gasket creep. Retorque loose fasteners to prevent leakage. Follow recommended torques stated in this manual.*



## ! CAUTION

*Pump not designed, tested or certified to be powered by compressed natural gas. Powering the pump with natural gas will void the warranty.*



## ! WARNING

*Before maintenance or repair, shut off the compressed air line, bleed the pressure, and disconnect the air line from the pump. The discharge line may be pressurized and must be bled of its pressure.*



## ! WARNING

*In the event of diaphragm rupture, pumped material may enter the air end of the pump, and be discharged into the atmosphere. If pumping a product which is hazardous or toxic, the air exhaust must be piped to an appropriate area for safe disposition.*



## ! WARNING

*Take action to prevent static sparking. Fire or explosion can result, especially when handling flammable liquids. The pump, piping, valves, containers or other miscellaneous equipment must be grounded. (See page 10)*



## ! WARNING

*This pump is pressurized internally with air pressure during operation. Always make certain that all bolting is in good condition and that all of the correct bolting is reinstalled during assembly.*



## ! WARNING

*When used for toxic or aggressive fluids, the pump should always be flushed clean prior to disassembly.*



## ! WARNING

*Before doing any maintenance on the pump, be certain all pressure is completely vented from the pump, suction, discharge, piping, and all other openings and connections. Be certain the air supply is locked out or made non-operational, so that it cannot be started while work is being done on the pump. Be certain that approved eye protection and protective clothing are worn all times in the vicinity of the pump. Failure to follow these recommendations may result in serious injury or death.*



## ! WARNING

*Airborne particles and loud noise hazards. Wear ear and eye protection.*



## ! WARNING

*Use safe practices when lifting*

## RECYCLING

Many components of SANDPIPER® AODD pumps are made of recyclable materials (see chart on page 12 for material specifications). We encourage pump users to recycle worn out parts and pumps whenever possible, after any hazardous pumped fluids are thoroughly flushed.

# MATERIAL CODES

## THE LAST 3 DIGITS OF PART NUMBER

000	Assembly, sub-assembly; and some purchased items	353	Geolast; Color: BLACK	557	Conductive Polypropylene; Color: BLACK; Color Coded: SILVER
010	Cast Iron	354	Injection Molded #203-40 Santoprene- Duro 40D +/-5; Color: RED	558	Conductive HDPE; Color: BLACK Color Coded: SILVER
012	Powered Metal	355	Thermal Plastic	559	Conductive Polypropylene; Color: BLACK Color Coded: SILVER
015	Ductile Iron	356	HytreI; Color: BLUE	570	Rulon II
020	Ferritic Malleable Iron	357	Injection Molded Polyurethane; Color: GREEN	580	Ryton
025	Music Wire	358	Urethane Rubber; Color: NATURAL (Some Applications)	590	Valox
080	Carbon Steel, AISI B-1112	359	(Compression Mold)	591	Nylatron G-S
100	Alloy 20	360	Urethane Rubber; Color: NATURAL	592	Nylatron NSB
110	Alloy Type 316 Stainless Steel	361	Nitrile Rubber; Color Coded: RED	600	PTFE (virgin material)
111	Alloy Type 316 Stainless Steel (Electro Polished)	362	Nitrile		Tetrafluorocarbon (TFE)
112	Alloy C	363	FKM (Fluorocarbon). Color Coded: YELLOW	601	PTFE (Bronze and moly filled)
113	Alloy Type 316 Stainless Steel (Hand Polished)	364	E.P.D.M. Rubber. Color Coded: BLUE	602	Filled PTFE
114	303 Stainless Steel	365	Neoprene Rubber; Color Coded: GREEN	603	Blue Gylon
115	302/304 Stainless Steel	366	Food Grade Nitrile; Color: WHITE	604	PTFE
117	440-C Stainless Steel (Martensitic)	368	Food Grade EPDM; Color: GRAY	606	PTFE
120	416 Stainless Steel (Wrought Martensitic)	370	Butyl Rubber Color Coded: BROWN	607	Envelon
123	410 Stainless Steel (Wrought Martensitic)	371	Phlthane (Tuftane)	608	Conductive PTFE; Color: BLACK
148	Hardcoat Anodized Aluminum	374	Carboxylated Nitrile	610	PTFE Encapsulated Silicon
149	2024-T4 Aluminum	375	Fluorinated Nitrile	611	PTFE Encapsulated FKM
150	6061-T6 Aluminum	378	High Density Polypropylene	632	Neoprene/Hytrel
151	6063-T6 Aluminum	379	Conductive Nitrile; Color Coded: RED & SILVER	633	FKM/PTFE
152	2024-T4 Aluminum (2023-T351)	384	Conductive Neoprene; Color Coded: GREEN & SILVER	634	EPDM/PTFE
154	Almag 35 Aluminum	405	Cellulose Fibre	635	Neoprene/PTFE
155	356-T6 Aluminum	408	Cork and Neoprene	637	PTFE , FKM/PTFE
156	356-T6 Aluminum	425	Compressed Fibre	638	PTFE , Hytrel/PTFE
157	Die Cast Aluminum Alloy #380	426	Blue Gard	639	Nitrile/TFE
158	Aluminum Alloy SR-319	440	Vegetable Fibre	643	Santoprene®/EPDM
159	Anodized Aluminum	465	Fibre	644	Santoprene®/PTFE
162	Brass, Yellow, Screw Machine Stock	500	Delrin 500	656	Santoprene Diaphragm and Check Balls/EPDM Seats
165	Cast Bronze, 85-5-5-5	501	Delrin 570	661	EPDM/Santoprene
166	Bronze, SAE 660	502	Conductive Acetal, ESD-800; Color: BLACK	666	FDA Nitrile Diaphragm, PTFE Overlay, Balls, and Seals
170	Bronze, Bearing Type, Oil Impregnated	503	Conductive Acetal, Glass-Filled Color: BLACK; Color Coded: YELLOW	668	PTFE, FDA Santoprene/PTFE
175	Die Cast Zinc	505	Acrylic Resin Plastic		
180	Copper Alloy	506	Delrin 150		
305	Carbon Steel, Black Epoxy Coated	520	Injection Molded PVDF; Color: NATURAL		
306	Carbon Steel, Black PTFE Coated	521	Injection Molded Conductive PVDF; Color: BLACK; Color Coded: LIGHT GREEN		
307	Aluminum, Black Epoxy Coated	540	Nylon		
308	Stainless Steel, Black PTFE Coated	541	Nylon		
309	Aluminum, Black PTFE Coated	542	Nylon		
310	PVDF Coated	544	Nylon Injection Molded		
313	Aluminum, White Epoxy Coated	550	Polyethylene		
330	Zinc Plated Steel	551	Glass Filled Polypropylene; Color: BLACK		
331	Chrome Plated Steel	552	Unfilled Polypropylene; Color: NATURAL		
332	Aluminum, Electroless Nickel Plated	555	Polyvinyl Chloride		
333	Carbon Steel, Electroless Nickel Plated	556	Black Vinyl		
335	Galvanized Steel				
336	Zinc Plated Yellow Brass				
337	Silver Plated Steel				
340	Nickel Plated				
342	Filled Nylon				
351	Food Grade Santoprene; Color: NATURAL				

Delrin is a registered  
tradename of E.I. DuPont.

Gylon is a registered tradename  
of Garlock, Inc.

Nylatron is a registered tradename  
of Polymer Corp.

Santoprene is a registered tradename  
of Exxon Mobil Corp.

Rulon II is a registered tradename  
of Dixon Industries Corp.

Ryton is a registered tradename  
of Phillips Chemical Co.

Valox is a registered tradename  
of General Electric Co.

PortaPump, Tranquizer and SludgeMaster are  
registered tradenames of Warren Rupp, Inc.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	031.012.000	SLEEVE & SPOOL SET	1
2	070.006.170	BEARING	2
3	095.043.156	BODY, AIR VALVE	1
4	095.073.001	ASSEMBLY, PILOT VALVE	1
4-A	095.070.558	BODY, PILOT VALVE	1
4-B	560.023.360	O-RING (SPOOL)	2
4-C	560.033.360	O-RING	4
4-D	675.037.080	RETAINING RING	1
4-E	755.025.000	SLEEVE, PILOT VALVE	1
4-F	775.026.000	SPOOL, PILOT VALVE	1
5	114.002.156	INTERMEDIATE	1
6	115.020.080	BRACKET, FOOT	2
7	115.021.080	BRACKET, FOOT	2
8	132.002.360	BUMPER, DIAPHRAGM PLATE	2
9	132.014.358	BUMPER, AIR VALVE	2
10	135.016.162	BUSHING, THREADED, W/ O-RING 560.001.360	2
11	165.011.157	CAP, END	2
12	170.012.330	CAPSCREW, HEX HEAD 1/2-13 UNC X 2.00	8
13	170.023.330	CAPSCREW, HEX HEAD	4
14	170.024.330	CAPSCREW, HEX HEAD, 7/16-14 X 1	8
15	170.032.330	CAPSCREW, HEX HEAD	8
16	170.045.330	CAPSCREW HEX HEAD	4
17	170.066.330	CAPSCREW, HEX, 1/2-13 X 2.25	36
18	172.001.330	CAPSCREW, SOCKET	12
19	196.003.155	CHAMBER, INNER	2
20	196.004.155	CHAMBER, OUTER	2
21	286.018.354	DIAPHRAGM	2
	286.018.357	DIAPHRAGM	2
	286.018.360	DIAPHRAGM	2
	286.018.365	DIAPHRAGM	2
22	312.015.155	ELBOW, SUCTION	2
23	312.016.155	ELBOW, DISCHARGE	2
24	334.020.000	FLANGE, FOLLOWER	4
25	338.008.360	FLAP VALVE	4
	338.008.365	FLAP VALVE	4
	338.011.354	FLAP VALVE	4
	338.011.356	FLAP VALVE	4
	338.011.357	FLAP VALVE	4
26	360.010.425	GASKET, END CAP	2
27	360.013.379	GASKET, FLANGE	4
	360.013.384	GASKET, FLANGE	4
28	360.014.379	GASKET, FLANGE	4
	360.014.384	GASKET, FLANGE	4
29	360.021.000	GASKET	4

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
30	360.041.379	GASKET, VALVE BODY	1
31	360.048.425	GASKET, VALVE BODY	1
32	518.014.156	MANIFOLD	2
33	545.007.330	NUT, HEX - 7/16-14	20
34	545.008.330	NUT, HEX, 1/2-13	24
35	547.002.110	NUT, STOP	8
36	547.006.330	NUT, STOP	2
37	560.001.360	O-RING	2
38	560.020.360	O-RING	6
39	560.022.360	O-RING	2
40	570.002.360	PAD, HINGE	4
	570.002.364	PAD, HINGE	4
	570.002.365	PAD, HINGE	4
41	570.012.371	PAD, WEAR	2
42	612.014.000	PLATE, DIAPHRAGM	2
43	612.015.156	PLATE, OUTER DIAPHRAGM	2
44	618.003.330	PLUG, PIPE, 1/4	2
45	618.004.330	PIPE, PLUG	2
46	620.011.114	PLUNGER, ACTUATOR	2
47	670.006.115	RETAINER, FLAP VALVE	4
48	685.008.120	ROD, DIAPHRAGM	1
49	720.004.360	SEAL, U-CUP	2
50	722.007.115	SEAT, FLAP VALVE	4
51	807.016.330	7/16-14 X 3 STUD	12
52	807.017.330	7/16-14 X 3 STUD	8
53	807.018.110	STUD, 1/4-20	8
54	900.003.330	WASHER, LOCK, 1/2	8
55	900.006.330	WASHER, LOCK - 7/16 1	2
56	901.006.330	WASHER, FLAT, 1/2	12
57	901.011.180	WASHER	12
58	901.013.180	WASHER, SEALING	2
59	901.023.330	WASHER, FLAT	2

NOT SHOWN:


031.019.156.	MAIN AIR VALVE ASSEMBLY	1
	(includes items 10, 11, 13, 14, 15 & 16)	
901.035.115.	WASHER FLAT	8
	(used w/Santoprene Flaps)	

**HDF4-A Type 3**

60	545.009.330.	HEX NUT	8
61	900.007.330.	LOCK WASHER	8
62	807.005.330.	STUD	8
63	360.036.426.	FLANGE GASKET	2
64	334.037.010.	ADAPTOR FLANGE	2

NOT SHOWN:

770.020.080.	SPACER, FOOT	4
901.006.330.	WASHER, FLAT (used w/ foot spacer)	8
900.003.330.	WASHER, LOCK	8
170.013.330.	CAPSCREW, HEX HEAD	8
545.008.330	NUT, HEX	4

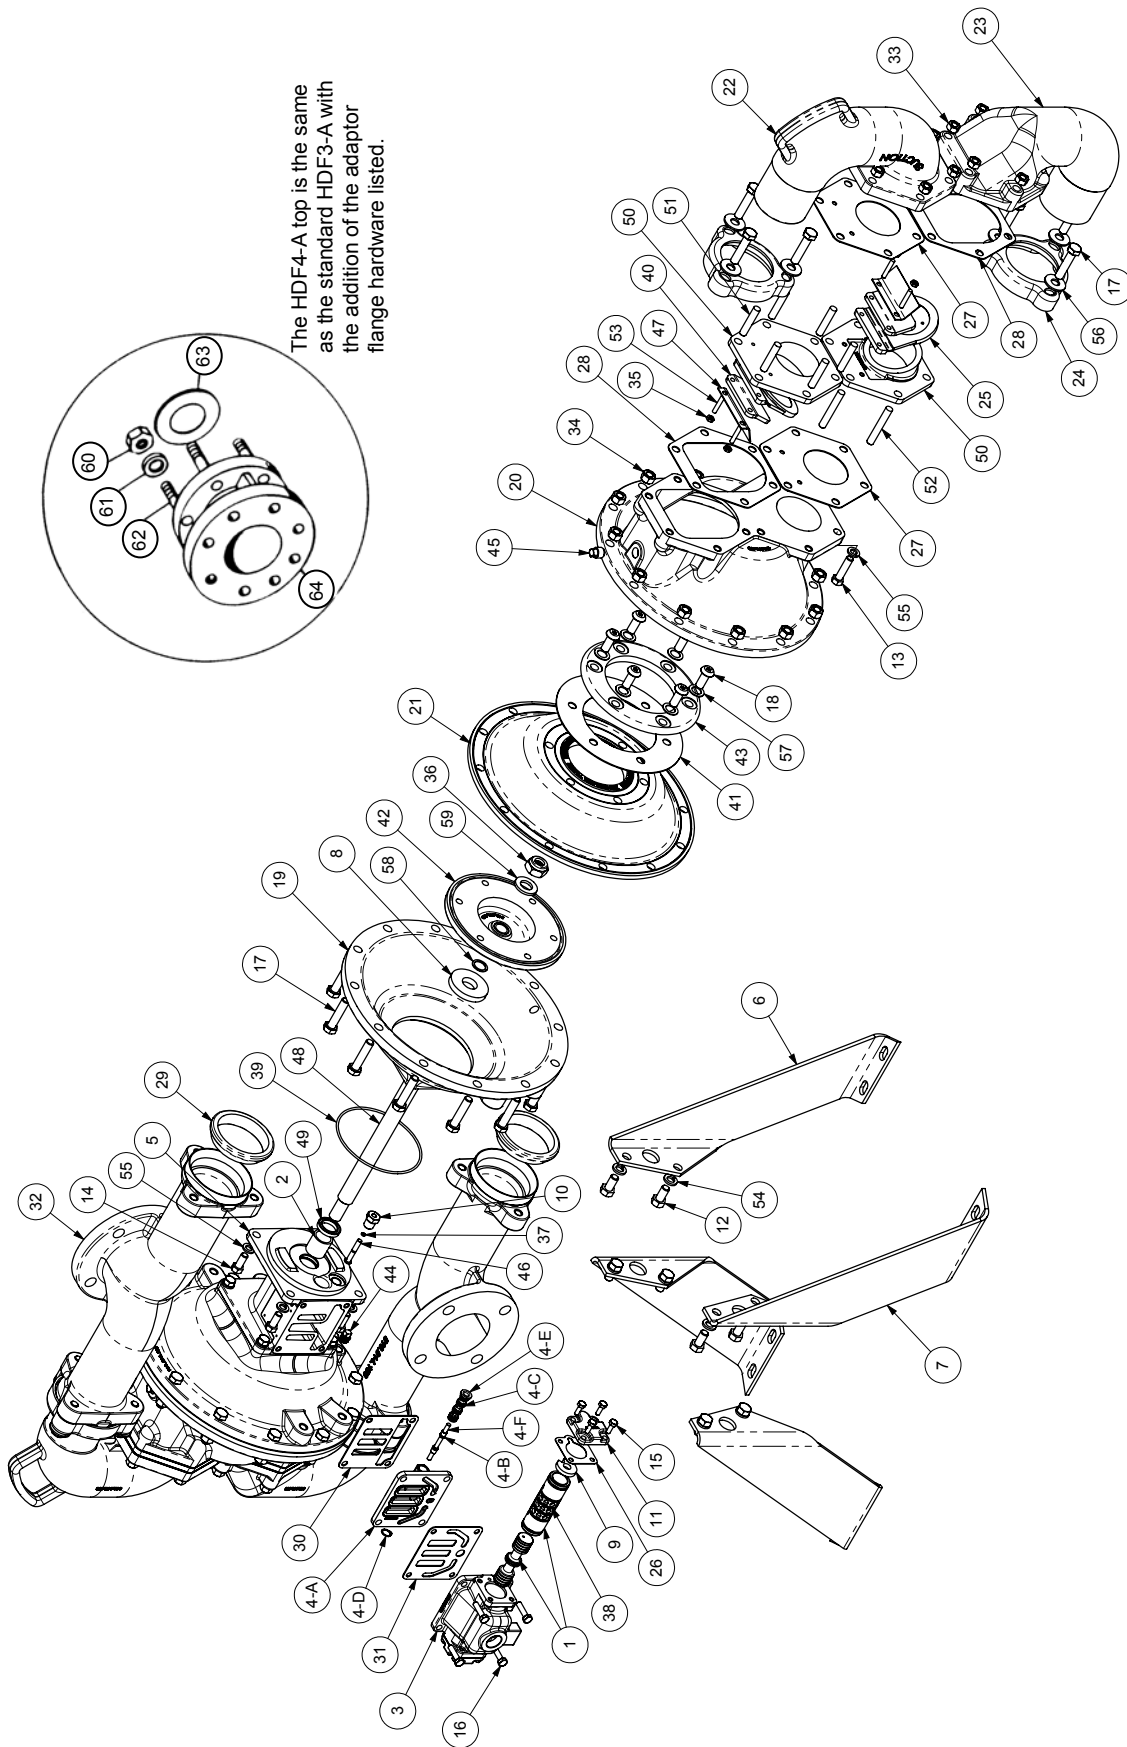

©2010 Warren Rupp, Inc. All rights reserved.

®SANDPIPER is a registered trademark of Warren Rupp, Inc.





# Declaration of Conformity

**Manufacturer:**  
**Warren Rupp, Inc.®, 800 N. Main Street**  
**Mansfield, Ohio, 44902 USA**

certifies that Air-Operated Double Diaphragm Pump Series: HDB, HDF, M Non-Metallic, S Non-Metallic, M Metallic, S Metallic, T Series, G Series, RS Series U Series, EH and SH High Pressure, W Series, SMA and SPA Submersibles, and Tranquilizer Surge Suppressors comply with the European Community Directive 2006/42/EC on Machinery, according to Annex VIII. This product has used Harmonized Standard EN809:1998+A1:2009, Pumps and Pump Units for Liquids - Common Safety Requirements, to verify conformance.

David Roseberry  
Signature of authorized person

October 20, 2005  
Date of issue

David Roseberry  
Printed name of authorized person

Engineering Manager  
Title

Revision Level: F

April 19, 2012  
Date of revision



# **WARREN RUPP, INC.**

## **EC Declaration of Conformity**

In accordance with ATEX Directive 94/9/EC,  
Equipment intended for use in potentially explosive environments.

**Manufacturer:**

Warren Rupp, Inc.®  
A Unit of IDEX Corporation  
800 North Main Street  
P.O. Box 1568  
Mansfield, OH 44902 USA

**Applicable Standard:**

EN13463-1: 2009  
EN13463-5: 2011



**EN 60079-25: 2011**

For pumps equipped with Pulse Output ATEX Option  
Quality B.V. (0344)

**AODD Pumps and Surge Suppressors**

For Type Examination Designations, see page 2 (back)

**AODD (Air-Operated Double Diaphragm) Pumps**

EC Type Examination Certificate No. Pumps: KEMA 09ATEX0071 X

DEKRA Certification B.V. (0344)  
Meander 1051  
6825 MJ Arnhem  
The Netherlands

**SANDPIPER®**  
A WARREN RUPP, INC. BRAND

**Tranquilizer®**

DATE/APPROVAL/TITLE:  
14 MAY 2014


*David Roseberry*  
David Roseberry, Engineering Manager

**IDEX**  
FLUID & METERING

# WARREN RUPP, INC.

## EC Declaration of Conformity

### ATEX Summary of Markings

Type		Marking	Listed In	Non-Conductive Fluids
Pump types, S1F, S15, S20, and S30 provided with the pulse output option		II 2 G Ex ia c IIC T5 II 3/2 G Ex ia c IIC T5 II 2 D Ex c iaD 20 IP67 T100°C	KEMA 09ATEX0071 X CE 0344	KEMA 09ATEX0071 X KEMA 09ATEX0071 X KEMA 09ATEX0071 X
Pump types, S1F, S15, S20, and S30 provided with the integral solenoid option		II 2 G EEx m c II T5 II 3/2 G EEx m c II T5 II 2 D c IP65 T100°C	KEMA 09ATEX0071 X CE 0344	KEMA 09ATEX0071 X KEMA 09ATEX0071 X KEMA 09ATEX0071 X
Pump types, HDB1½, HDB40, HDB2, HDB50, HDB3, HDF1, HDF25, HDF2, HDF3M, PB¼, S05, S1F, S15, S20, S30, SB1, SB25, ST1½, ST40, G15, G20, and G30, without the above listed options, no aluminum parts		II 1 G c T5 II 3/1 G c T5 II 1 D c T100°C I M1 c I M2 c	KEMA 09ATEX0071 X KEMA 09ATEX0072 X CE 0344	KEMA 09ATEX0071 X KEMA 09ATEX0071 X KEMA 09ATEX0071 X KEMA 09ATEX0071 X KEMA 09ATEX0072 X
Pump types, DMF2, DMF3, HDB1½, HDB40, HDB2, HDB50, HDB3, HDF1, HDF25, HDF2, HDF3M, PB¼, S05, S1F, S15, S20, S30, SB1, SB25, SE½, ST1, ST25, ST1½, ST40, U1F, G05, G1F, G15, G20, and G30		II 2 G c T5 II 3/2 G c T5 II 2 D c T100°C	KEMA 09ATEX0072 X CE	KEMA 09ATEX0072 X KEMA 09ATEX0072 X KEMA 09ATEX0072 X
Surge Suppressors all types		II 2 G T5 II 3/2 G T5 II 2 D T100°C	KEMA 09ATEX0073 CE	KEMA 09ATEX0073 KEMA 09ATEX0073 KEMA 09ATEX0073

EC Type Certificate No. Pumps: KEMA 09ATEX0071 X  
Type Certificate No. Pumps: KEMA 09ATEX0072 X  
Type Certificate No. Suppressors: KEMA 09ATEX0073

Pumps marked with equipment Category II 3/1 G (internal 3 G / external 1 G), 1D, M1 and M2 when used for non-conductive fluids.  
The pumps are Category II 2 G when used for conductive fluids.

Pumps and surge suppressors marked with equipment Category II 3/2 (internal 3 G / external 2 G), 2D when used for non-conductive fluids.  
The pumps are Category II 2 G when used for conductive fluids.