



LOFTOP™ Nylon filter cartridges

Eaton's LOFTOP Nylon filter cartridges are suitable for the filtration of solvents, amine, glycol solutions, hydrocarbon (kerosene), solvent and aqueous based paints, lacquers, emulsions, waxes, return condensate and high temperature fluids.

LOFTOP Nylon filter cartridges are made of high purity polyamide 6.6 fibers. The product includes an integral fiberglass reinforced polyamide support core.

Features and benefits

- Made of high purity polyamide 6.6 fibers (melt-blown)
- No binders or adhesives
- Excellent chemical and thermal compatibility
- Available in a variety of end cap/adaptor configurations to fit all industry-standard housings
- Beta rating of 5000, 99.98% efficiency
- Individually sealed in plastic foil

Specifications

Filter material
Polyamide 6.6 (melt-blown)

Inner core
Polyamide 6.6 fiberglass reinforced

End caps
Polyamide 6.6

O-rings
Silicone (standard), FKM, FEP/FKM

Retention ratings
1, 3, 5, 10, 20, 50 µm @ 99.98% efficiency

Technical data

Nominal lengths
10", 20", 30", 40"
(254, 508, 762, 1016 mm)

Outside diameter
2.5" (63 mm)

Inside diameter
1.1" (28 mm)

Max. operating temperature
302 °F (150 °C)

Max. differential pressures*
90 psid @ 86 °F (6.2 bar @ 30 °C)
80 psid @ 158 °F (5.5 bar @ 70 °C)
70 psid @ 212 °F (4.8 bar @ 100 °C)
50 psid @ 302 °F (3.4 bar @ 150 °C)

* Only fiberglass reinforced polyamide 6.6 inner core

Recommended differential change-out pressure for disposal
35 psid (2.4 bar)




Powering Business Worldwide

LOFTOP nylon filter cartridges

Flow rate*

(70°F/21°C per 10" element for water)

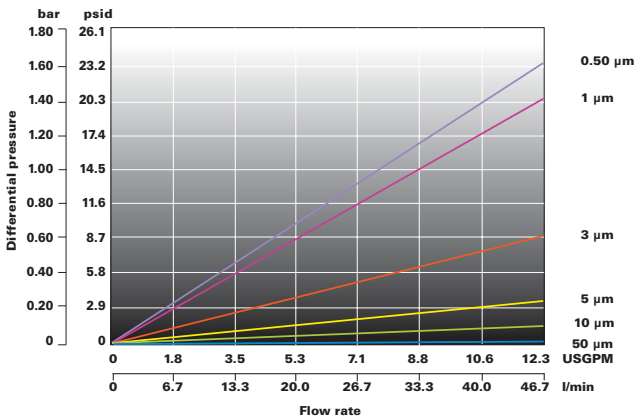

* For liquids other than water, multiply pressure drop by fluid viscosity in centipoise.


Ordering code

Filter type

LTN: LOFTOP Nylon

Adapter codes

- (): DOE without foamed polyethylene gaskets
- G: DOE with foamed polyethylene gaskets
- 1: SOE 226 O-rings, bayonet/flat
- 2: SOE 222 O-rings, spear
- 3: SOE 226 O-rings, bayonet/spear
- 4: SOE 222 O-rings, flat

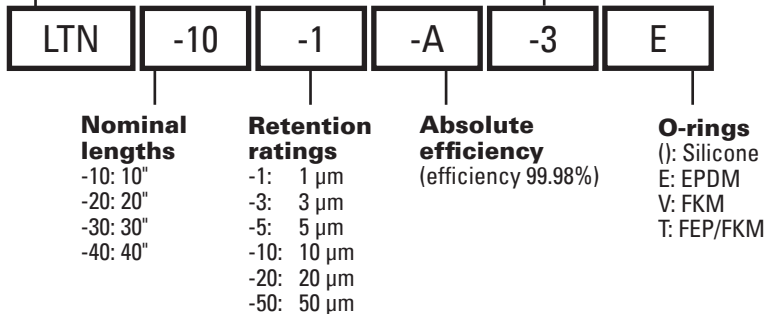

For more information, please
email us at filtration@eaton.com
or visit www.eaton.com/filtration

© 2020 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.