



## LOFWIND™ string wound filter cartridges

Eaton's LOFWIND filter cartridges are suitable for the filtration of process chemicals, photo chemicals, film developers, solvents, galvanic baths, edible oils, fats, acids and bases, process water, as well as for water treatment, condensate preparation and sea water desalination.

LOFWIND filter cartridges offer a wide range of retention ratings. The graded pore structure allows efficient particle retention. They are further characterized by a low initial differential pressure.

### Features and benefits

- String wound depth filter cartridges
- Broad range of applications due to a wide chemical compatibility
- Many different combinations of filter materials and inner cores

### Specifications

#### Filter materials

Bleached cotton,  
Fiberglass, washed  
Polypropylene

#### Inner core

Polypropylene,  
Stainless steel

#### Retention ratings

0.5, 1, 5, 10, 25, 50, 75, 100,  
150 µm

### Technical data

#### Nominal lengths

5", 9.75", 10", 19.5", 20", 29.25", 30", 40"  
(127, 248, 254, 495, 508, 743, 762, 1016 mm)

#### Outside diameter

2.4" (62 mm)

#### Inside diameter

1.1" (28 mm)

#### Max. operating temperatures

Polypropylene: 176 °F ( 80 °C)  
Cotton: 320 °F (160 °C)  
Glass fiber: 752 °F (400 °C)

#### Max. differential pressure

36 psid @ 86 °F (2.5 bar @ 30 °C)

#### Recommended differential change-out pressure for disposal

35 psid (2.4 bar)




Powering Business Worldwide

# LOFWIND string wound filter cartridges

## Flow rate\*

(Water/ $\Delta p = 0.15$  bar per 9<sup>3/4</sup>" element)

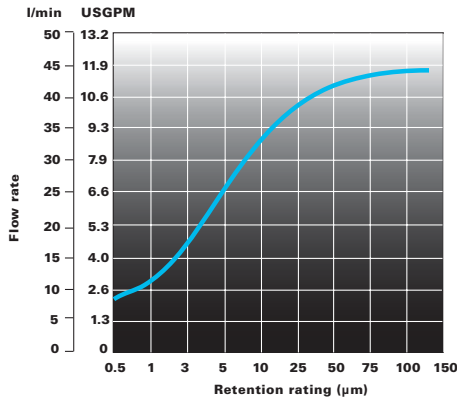

\* For liquids other than water, multiply pressure drop by fluid viscosity in centipoise.


## Ordering code

### Nominal lengths

- 5: 5"
- 9: 9.75"
- 10: 10"
- 19: 19.5"
- 20: 20"
- 29: 29.25"
- 30: 30"
- 40: 40"

### Core materials

- P: Polypropylene
- S: Stainless steel



### Filter type

LW: LOFWIND

### Filter materials

- B: Bleached cotton
- H: Fiberglass
- P: Polypropylene
- W: Washed Polypropylene

### Retention ratings

- 0.5: 0.50µm
- 1: 1 µm
- 5: 5 µm
- 10: 10 µm
- 25: 25 µm
- 50: 50 µm
- 75: 75 µm
- 100: 100 µm
- 150: 150 µm

**North America**  
 44 Apple Street  
 Tinton Falls, NJ 07724  
 Toll Free: 800 656-3344  
 (North America only)  
 Tel: +1 732 212-4700

**China**  
 No. 3, Lane 280,  
 Linhong Road  
 Changning District, 200335  
 Shanghai, P.R. China  
 Tel: +86 21 5200-0099

**Europe/Africa/Middle East**  
 Auf der Heide 2  
 53947 Nettersheim, Germany  
 Tel: +49 2486 809-0

**Singapore**  
 100G Pasir Panjang Road #07-08  
 Singapore 118523  
 Tel: +65 6825-1668

Friedensstraße 41  
 68804 Altlußheim, Germany  
 Tel: +49 6205 2094-0  
 An den Nahewiesen 24  
 55450 Langenlonsheim, Germany  
 Tel: +49 6704 204-0

**Brazil**  
 Av. Ermanno Marchetti, 1435 -  
 Água Branca, São Paulo - SP,  
 05038-001, Brazil  
 Tel: +55 11 3616-8461

For more information, please  
 email us at [filtration@eaton.com](mailto:filtration@eaton.com)  
 or visit [www.eaton.com/filtration](http://www.eaton.com/filtration)

© 2020 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

EN  
 EF-LW  
 06-2020